



G. R. BOND Compression / Shear. "O" Type mounts are used to provide resilient support for small to medium size units in engineering applications.

The numerous sizes, types and metal fittings available make possible a wide variety of applications and design options.


TYPE 1

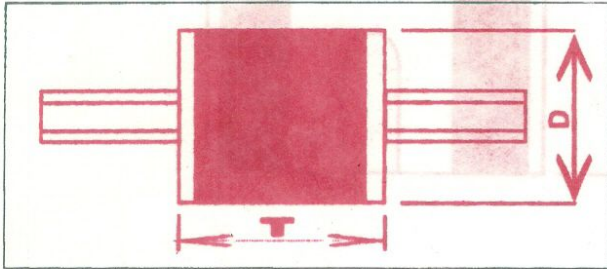


TYPE 2

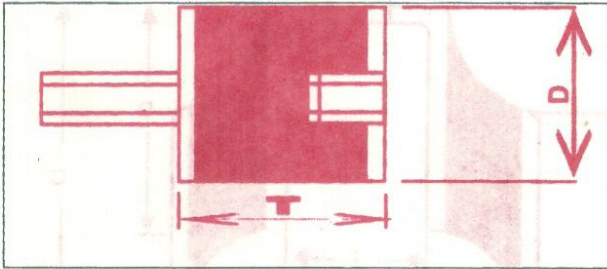


TYPE 3

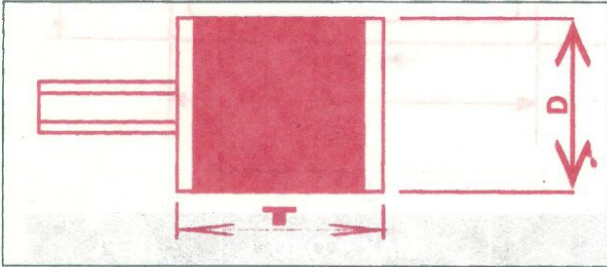

TYPE 4

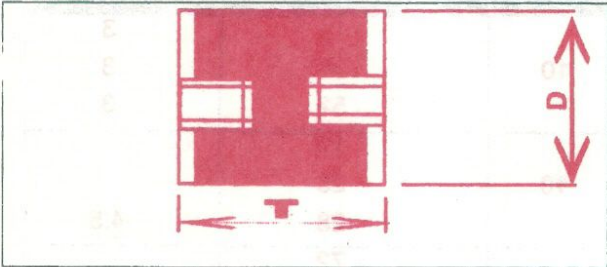

TYPE 5

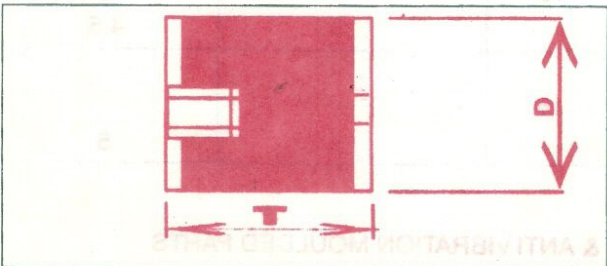

SIZE (D X T) (mm)	MAX LOAD (kg)	STATIC DEF. (mm)	THREAD SIZE	
			BOLT	NUT
O 19 x 19	A 18	3	1/4" WHIT x 19L	1/4" WHIT x 6 Deep
	B 25	3		
	C 35	3		
O 25 x 20	A 30	3.5	M6 x 1Px13L	M6x1Px6Deep
	B 45	3.5		
	C 60	3.5		
O 25 x 30	A 37	3	M8x125P x20	M8 x 1.25 x6 Deep
	B 52	3		
	C 73	3		
O 38 x 25	A 70	4	M8 X 1.25P x17L	M8 X 1.25P x6 Deep
	B 110	4		
	C 175	4		
O 38 x 38	A 50	6	M8 x 1.5P x17L	M10 x 1.5P x 6Deep
	B 67	6		
	C 85	6		
O 40 x 40	A 43	6	M10x1.5P x17L	M8x1.25P x6Deep
	B 67	6		
	C 85	6		
O 50x40	A 65	5	M10x1.5P x22L	M10x1.5P x12 Deep
	B 110	5		
	C 150	5		
O 50 x 50	A 76	7	M10x1.5P x22L	M10x1.5P x12Deep
	B 100	7		
	C 120	7		
O 55 x 38	A 58	3	3/8"Whit x34L	3/8"Whit x12 Deep
	B 84	3		
	C 117	3		
O 60x50	A 110	6.5	M12x1.75p x27L	M12x1.75p x15 Deep
	B 145	6.5		
	C 185	6.5		
O 60x60	A 110	8	M12 x 1.75P x27L	M12x1.75P x 15Deep
	B 150	8		
	C 200	8		
O 80x60	A 300	8	M12 x 1.75P x30L	M12x1.75P x20 Deep
	B 400	8		
	C 520	8		
O 80x75	A 205	10	M12 x 1.75P x30L	M12x1.75P x20 Deep
	B 310	10		
	C 420	10		
O 100x75	A 288	1	M12x1.75P x30L	M12x1.75P x20 Deep
	B 390	10		
	C 520	10		
O 100x90	A 285	12	M12x1.75P x30L	M12x1.75P x20 Deep
	B 400	12		
	C 540	12		
O 115x100	A 380	10	M14x2P x35L	M14x2P x35Deep
	B 540	10		
	C 720	10		